Accessories for GF, GFX and PS machines



Illustration: GF TOP Saw Blade Lubricant

Saw blade lubricant GF TOP

Synthetic high quality lubricant for sawing and milling.

Increases the service life of the saw blade.

Fulfills the requirements for H2 lubricants.

Thanks to the screw-on brush, simple and even lubrication of the saw blade is ensured.

ITEM	VERSION	CODE	KG
GF TOP saw blade-lubricant, tube 180g	Tube, 180 g	790060228	0,21



Illustration: Saw Blade Lubricating Paste GF LUB

Saw blade lubricating paste GF LUB

Chlorine-free high-performance lubricating paste for sawing and milling.

Increases the service life of the saw blade.

This ecological lubricating paste is the environmentally friendly successor to ROCOL, with a new name and improved quality.

GF LUB complies with the latest environmental guidelines and ecological standards.

ITEM	VERSION	CODE	KG
GF LUB saw blade lubricant, 160 ml	Tube, 160 ml	790041016	0,16



Illustration: Special Gear Oil

Special gear oil

For all GF and RA types.

ITEM	VERSION	CODE	KG
Gear oil, bottle, 250 ml	Bottle, 250 ml	790041030	0,235

Replacement cable with rotary contact

Prevents twisting of the cable.

For all GF, GFX, RA and PS machines with protection class II.

ITEM	VERSION	CABLE LENGTH [M]	CABLE LENGTH [FT]	CODE	KG
Swivel cable, cpl.	230 V, 50/60 Hz EU	4	13.12	790142081	0,68
Swivel cable, cpl.	120 V, 50/60 Hz US/ CA	4	13.12	790142082	0,65
Swivel cable, cpl.	230 V, 50/60 Hz CH	4	13.12	790142083	0,60
Swivel cable, cpl.	230 V, 50/60 Hz AUS	4	13.12	790142084	0,66
Swivel cable	120 V, 50/60 Hz GB	4	13.12	790142087	0,74
Swivel cable	230 V, 50/60 Hz EU	4	13.12	790142076	0,11
Swivel cable	230 V, 50/60 Hz EU	4	13.12	790142077	0,11
Swivel cable	230 V, 50/60 Hz CH	4	13.12	790142078	0,52
Swivel cable	120 V, 50/60 Hz GB	4	13.12	790142079	0,63
Swivel cable	230 V, 50/60 Hz AUS	4	13.12	790142080	0,56



Illustration: Flexible power cable



Illustration: Complete flexible swivel cable



Illustration: Quick-mounting plate with screw clamps GF, GFX



Illustration: Quick-mounting plate with screw clamps PS 4.5 Plus (cordless)



Illustration: Mobile workstation

Quick-mounting plates with screw clamps

For quick mounting of machines on workbenches.

Ideal for frequently changing locations.

ITEM	CODE	KG
Quick-mounting plate with screw clamp	790041027	4,23
Quick-mounting plate with screw clamp	790042027	6,165
PS quick-mounting plate for PS 4.5 Plus, PS 4.5 and PS 6.6**	790048334	2,60

*Incl. 4 Allen screws for attaching the PS to the quick-mounting plate.

Mobile workstation

For mobile use on construction sites and in workshops.

The ideal addition to all Orbitalum pipe saws, except for the PS 4.5 Plus (battery).

Advantages:

- Safe transport of machines on the construction site
- Flexible working at the respective workstations
- No setup times, e.g., mounting the pipe saw on workbenches
- Height-adjustable roller pipe support with stainless steel roller for supporting the pipes
- Lockable tool box with 4 drawers for tools and accessories
- Threaded lifting table for height adjustment of the machines to the respective pipe dimension
- Drip tray for chips

TECHNICAL SPECIFICATION	MOBILE WORKSTATION
Dimensions (LxWxH)	115 x 43 x 91 cm 45.3" x 16.9" x 35.8"
Max. load capacity	675 kg 1488.1 lbs

ITEM	CODE	KG
Mobile workstation	790068071	137,00

Pipe feeder basic unit and extension unit

The pipe feeder allows you to feed long and heavy pipes effortlessly and coaxially to the GF machines. Very robust and stable design with powder-coated frame and stainless steel rollers.

Advantages:

- Extreme stability and structural stability
- Rapid adjustment of dimensions
- Centering of pipes in seconds
- Specially coated, maintenance-free steel frame
- Stainless-steel rollers
- Extension of pipe feeder possible with add-on module
- Saves time and money
- Suitable for all steels




Illustration: pipe feeder



Illustration: extension unit


Pipe feeder basic unit

Fitting for all pipe cutting and beveling machines by Orbitalum Tools (excluded PS 4.5 (Plus)). The machines can be mounted directly and without special accessories on the mounting plate of the basic unit. Thanks to mechanical height-adjustment by means of a handwheel, the machine can be easily adjusted to the outer diameter of the pipe to be cut. The machine is spring-loaded on the mounting plate.

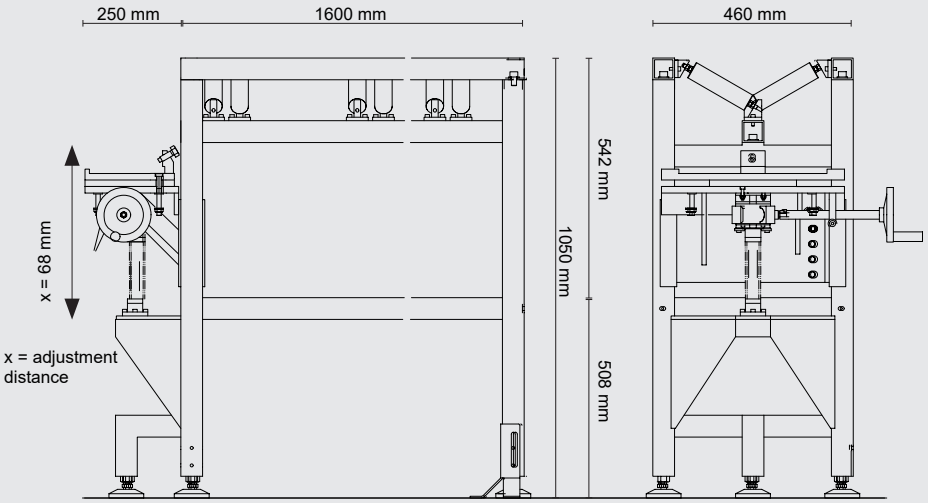

Extension unit:

For individual extension of the basic unit. Can be connected directly to the basic unit.

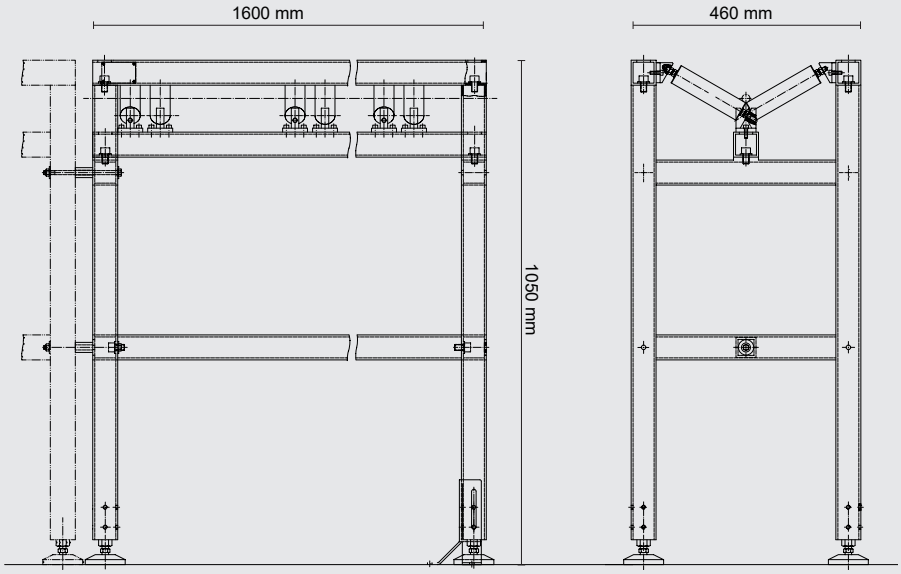

Floor bracket assembly:

For attaching the base or side unit.

APPLICATION AREA/ TECHNICAL SPECIFICATION	PIPE FEEDER BASIC UNIT	PIPE FEEDER EXTENSION UNIT
pipe OD AD	16 - 325 mm 0.63" - 12.8"	16 - 325 mm 0.63" - 12.8"
Dimensions approx.	185 x 105 x 50 cm 72.8" x 41.3" x 19.7"	approx. 160 x 105 x 50 62.9" x 41.3" x 19.7"
Max. load capacity	400 kg 881.8 lbs	400 kg 881.8 lbs
Height-adjustable quick-mounting plate (adjustment range)	68 mm 2.68"	– –

ITEM	CODE	KG
Pipe feeder base unit	790068051	116,00
Pipe feeder extension unit	790068061	72,00
Floor bracket accessory	790068053	1,90

Tripod

Made of aluminum. Suitable for PS 4.5 Plus (battery) and GFX 3.0.

Easy mounting of the saws directly on the tripod without a mounting plate.

Can be dismantled in just a few steps. Can be stored in the PS transport case. Space-saving – quick to use – easy to handle.

ITEM	CODE	KG
PS 4.5/PS 6.6/GFX 3.0 tripod	790048390	7,40



Illustration: Tripod for PS 4.5 Plus, GFX 3.0

Had sided transport case for GFX 3.0

High-quality, blue transport case with insert. Especially robust design.

ITEM	CODE	KG
GFX 3.0 transport case	790144019	12,50



Illustration: GFX 3.0 Hard-shell carrying case